


## SPECIFICATION SHEET

These durable Delrin cans are available in a variety of sizes for the most popular transmitter sizes. These are the standard build sizes, but they can be made to meet specific job requirements.


### 3AA Delrin

- Outer Size: 1.91" O.D. x 8.00"  
(48.5mm O.D. x 203.2mm)
- Inner Size: 1.30" O.D. x 7.08"  
(33.0mm O.D. x 179.8mm)
- Mounting Hole: 0.25" O.D., 0.25"  
from end  
(6.4mm O.D., 6.4mm from end)
- O-Ring <sup>3</sup>: #222

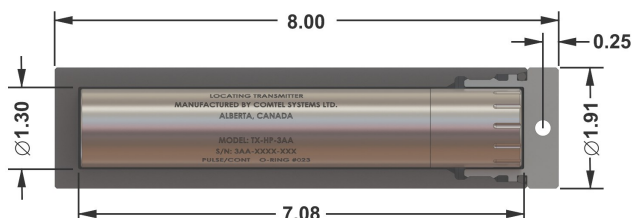


### 2C Delrin

- Outer Size: 2.45" O.D. x 6.53"  
(62.2mm O.D. x 165.9mm)
- Inner Size: 1.69" O.D. x 5.18"  
(42.9mm O.D. x 131.6mm)
- Mounting Hole: 0.25" O.D., 0.25"  
from end  
(6.4mm O.D., 6.4mm from end)
- O-Ring <sup>3</sup>: #225

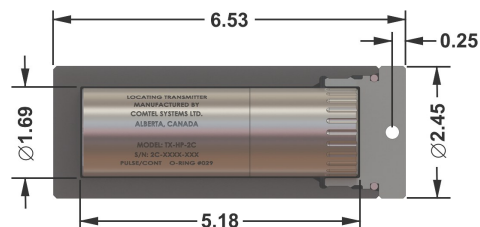



### 3C Delrin

- Outer Size: 2.45" O.D. x 9.32"  
(62.2mm O.D. x 236.7mm)
- Inner Size: 1.69" O.D. x 7.80"  
(42.9mm O.D. x 198.1mm)
- Mounting Hole: 0.25" O.D., 0.25"  
from end  
(6.4mm O.D., 6.4mm from end)
- O-Ring <sup>3</sup>: #225

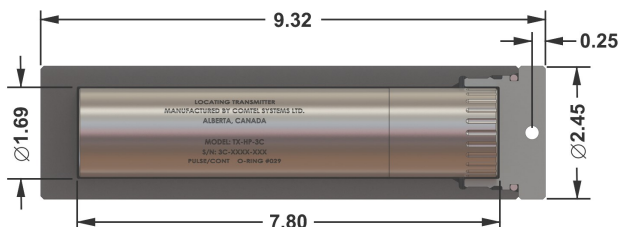

### 4C Delrin


- Outer Size: 2.45" O.D. x 10.50"  
(62.2mm O.D. x 266.7mm)
- Inner Size: 1.69" O.D. x 8.98"  
(42.9mm O.D. x 228.1mm)
- Mounting Hole: 0.25" O.D., 0.25"  
from end  
(6.4mm O.D., 6.4mm from end)
- O-Ring <sup>3</sup>: #225

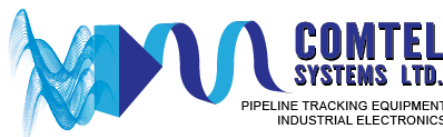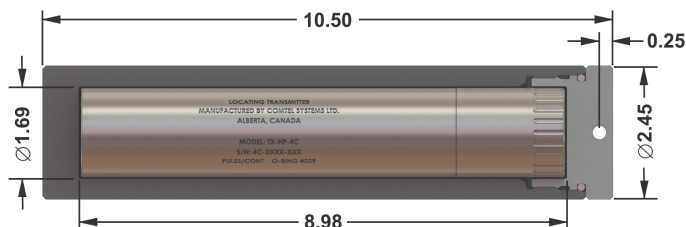

## SPECIFICATION SHEET


### 2D Delrin

- Outer Size: 3.48" O.D. x 7.80" (88.4mm O.D. x 198.1mm)
- Inner Size: 2.53" O.D. x 6.53" (64.3mm O.D. x 165.9mm)
- Mounting Hole: 0.25" O.D., 0.25" from end (6.4mm O.D., 6.4mm from end)
- O-Ring <sup>3</sup>: #232

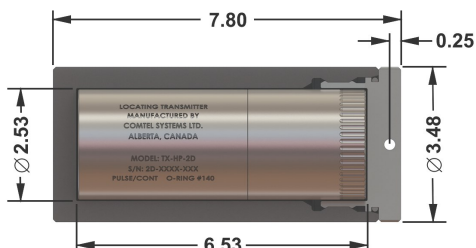



### 4D Delrin

- Outer Size: 3.48" O.D. x 12.50" (88.4mm O.D. x 317.5mm)
- Inner Size: 2.53" O.D. x 11.28" (64.3mm O.D. x 286.5mm)
- Mounting Hole: 0.25" O.D., 0.25" from end (6.4mm O.D., 6.4mm from end)
- O-Ring <sup>3</sup>: #232

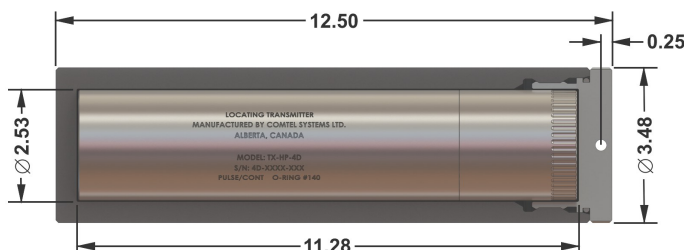

### 4D-XL Delrin


- Outer Size: 3.95" O.D. x 15.45" (100.3mm O.D. x 392.4mm)
- Inner Size: 2.53" O.D. x 11.28" (64.3mm O.D. x 286.5mm)
- Mounting Hole: 0.5" O.D., 0.5" from cap (12.7mm O.D., 12.7mm from end)  
0.5" O.D., 0.75" from base (12.7mm O.D., 19.1mm from base)
- O-Ring <sup>3</sup>: #232

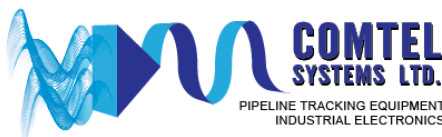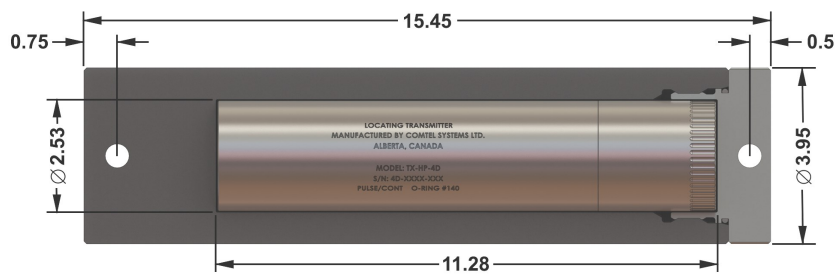

## SPECIFICATION SHEET


### 6D Delrin

- Outer Size: 3.48" O.D. x 17.83"  
(88.4mm O.D. x 452.9mm)
- Inner Size: 2.53" O.D. x 16.33"  
(64.3mm O.D. x 414.8mm)
- Mounting Hole: 0.25" O.D., 0.25" from both ends  
(6.4mm O.D., 6.4mm from both ends)
- O-Ring <sup>3</sup>: #232

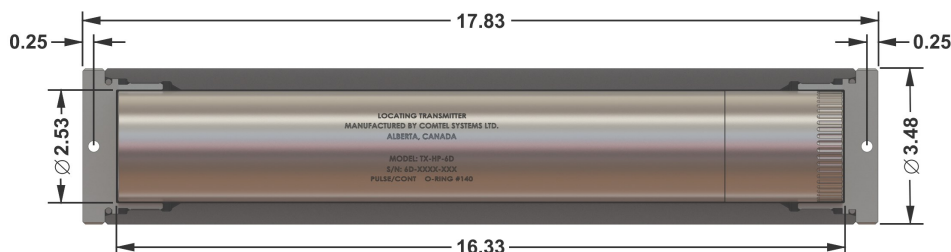

### 8D Delrin

- Outer Size: 3.48" O.D. x 23.93"  
(88.4mm O.D. x 607.8mm)
- Inner Size: 2.53" O.D. x 22.43"  
(64.3mm O.D. x 569.7mm)
- Mounting Hole: 0.25" O.D., 0.25" from both ends  
(6.4mm O.D., 6.4mm from both ends)
- O-Ring <sup>3</sup>: #232

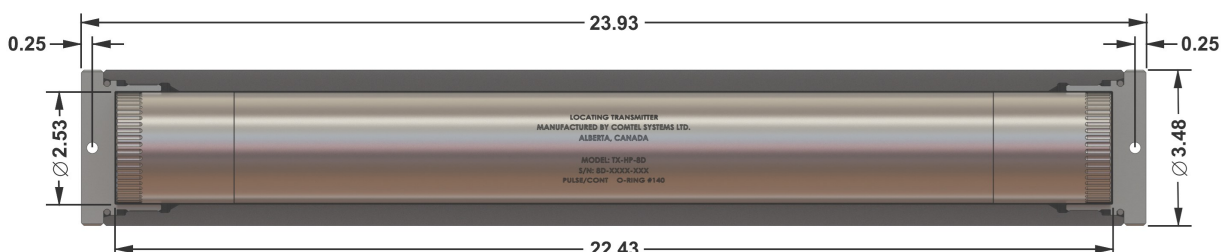

### Notes

1. Delrin cans are to always be used with an appropriately sized transmitter. Failure to do so will result in a collapse of the Delrin can under pipeline pressure.
2. Ideally, Delrin cans should be run with the cap facing the travel direction. If not possible, the base of the can should be supported in some manner. Inadequate support may result in damage and/or failure of the Delrin can.
3. Inspect the O-ring for damage and debris after every job, ensure the O-ring is greased with a silicone based lubricant.
4. Transmitter selection and bend traversal depends entirely on pig construction and configuration. Consult sales for selection assistance.

